


Flame-Retardant Heat Shrinkable Tubes

In Spool Box

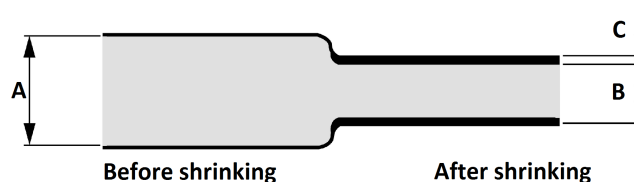

FEATURES:

Flexible, flame retardant heat shrink tubing with excellent physical and mechanical properties

SPECIFICATION:

Shrink ratio	2:1
Dielectric strength	15 kV/mm
Material	Polyolefin
Shrinkage temperature range	+75...+125 °C
Temperature range	-55...+125 °C

TECHNICAL CHARACTERISTICS:

		Testing method	Typical Performance	
Physical	Tensile strength	GB/T1040	≥10.4 MPa	
	Elongation	GB/T1040	≥200%	
	Tensile strength after aging/MPa	UL224; 158 °C×168hr	≥7.3	
	Elongation after aging	UL224; 158 °C×168hr	≥100%	
	Heat Resistance	UL224; 250 °C×4hr	No viscosity No cracking	
	Cold Bend	UL224; -30 °C×1hr	No cracking	
Electrical	Dielectric Withstand	300V	UL224	No Breakdown for 1500V
		600V	UL224	No Breakdown for 2500V
	Dielectric Strength	GB/T1408	≥15 kv/mm	
	Volume resistance Ω•cm	GB/T1410	≥1×10 ¹⁴	
Chemical	Anti Corrosion	UL224	PASS	
	Copper stability	UL224	PASS	
	Flammability	UL224	VW-1	

PRODUCT RANGE:

Art. Nr.	A	B	C	Length	Colour
RND 465-00237	1.2 mm	0.6 mm	0.36 mm	15 m	black
RND 465-00238	1.2 mm	0.6 mm	0.36 mm	15 m	yellow
RND 465-00239	1.2 mm	0.6 mm	0.36 mm	15 m	green
RND 465-00240	1.2 mm	0.6 mm	0.36 mm	15 m	white
RND 465-00241	1.2 mm	0.6 mm	0.36 mm	15 m	clear
RND 465-00242	1.6 mm	0.85 mm	0.36 mm	15 m	black
RND 465-00243	1.6 mm	0.85 mm	0.36 mm	15 m	red
RND 465-00244	1.6 mm	0.85 mm	0.36 mm	15 m	yellow
RND 465-00245	1.6 mm	0.85 mm	0.36 mm	15 m	clear
RND 465-00246	2.5 mm	1 mm	0.45 mm	15 m	black
RND 465-00247	2.5 mm	1 mm	0.45 mm	15 m	red
RND 465-00248	2.5 mm	1 mm	0.45 mm	15 m	yellow
RND 465-00249	2.5 mm	1 mm	0.45 mm	15 m	clear
RND 465-00250	3.2 mm	1.5 mm	0.45 mm	15 m	black
RND 465-00251	3.5 mm	1.5 mm	0.45 mm	15 m	red
RND 465-00252	3.5 mm	1.5 mm	0.45 mm	15 m	yellow
RND 465-00253	3.5 mm	1.5 mm	0.45 mm	15 m	blue
RND 465-00254	3.5 mm	1.5 mm	0.45 mm	15 m	clear
RND 465-00255	5 mm	2.3 mm	0.56 mm	10 m	black
RND 465-00256	5 mm	2.3 mm	0.56 mm	10 m	red
RND 465-00257	5 mm	2.3 mm	0.56 mm	10 m	yellow
RND 465-00258	5 mm	2.3 mm	0.56 mm	10 m	green
RND 465-00259	5 mm	2.3 mm	0.56 mm	10 m	blue
RND 465-00260	5 mm	2.3 mm	0.56 mm	10 m	white
RND 465-00261	5 mm	2.3 mm	0.56 mm	10 m	clear
RND 465-00262	6.5 mm	3 mm	0.56 mm	10 m	black
RND 465-00263	6.5 mm	3 mm	0.56 mm	10 m	red
RND 465-00264	6.5 mm	3 mm	0.56 mm	10 m	yellow
RND 465-00265	6.5 mm	3 mm	0.56 mm	10 m	green
RND 465-00266	6.5 mm	3 mm	0.56 mm	10 m	clear
RND 465-00267	9.5 mm	4.5 mm	0.56 mm	10 m	black
RND 465-00268	9.5 mm	4.5 mm	0.56 mm	10 m	red
RND 465-00269	9.5 mm	4.5 mm	0.56 mm	10 m	blue
RND 465-00270	10 mm	4.5 mm	0.56 mm	10 m	white
RND 465-00271	10 mm	4.5 mm	0.56 mm	10 m	clear
RND 465-00272	12.5 mm	6 mm	0.56 mm	5 m	black
RND 465-00273	12.5 mm	6 mm	0.56 mm	5 m	red
RND 465-00274	12.5 mm	6 mm	0.56 mm	5 m	yellow
RND 465-00275	12.5 mm	6 mm	0.56 mm	5 m	green
RND 465-00276	12.5 mm	6 mm	0.56 mm	5 m	blue
RND 465-00277	12.5 mm	6 mm	0.56 mm	5 m	clear
RND 465-00278	19 mm	9 mm	0.7 mm	5 m	black
RND 465-00279	19 mm	9 mm	0.7 mm	5 m	red
RND 465-00280	19 mm	9 mm	0.7 mm	5 m	green
RND 465-00281	19 mm	9 mm	0.7 mm	5 m	blue
RND 465-00282	19 mm	9 mm	0.7 mm	5 m	white
RND 465-00283	19 mm	9 mm	0.7 mm	5 m	clear
RND 465-00284	26 mm	12.5 mm	0.9 mm	5 m	black
RND 465-00285	26 mm	12.5 mm	0.9 mm	5 m	red
RND 465-00286	26 mm	12.5 mm	0.9 mm	5 m	green
RND 465-00287	26 mm	12.5 mm	0.9 mm	5 m	blue
RND 465-00288	26 mm	12.5 mm	0.9 mm	5 m	clear

PRODUCT RANGE:

Art. Nr.	A	B	C	Length	Colour
RND 465-00710	3 mm	1.5 mm	0.4 mm	15 m	brown
RND 465-00711	4.5 mm	2.3 mm	0.55 mm	10 m	brown
RND 465-00722	9 mm	4.5 mm	0.6 mm	10 m	brown
RND 465-00723	12 mm	6 mm	0.65 mm	5 m	brown
RND 465-00724	18 mm	9 mm	0.8 mm	5 m	brown
RND 465-00725	25 mm	12.5 mm	0.9 mm	5 m	brown
RND 465-00726	3 mm	1.5 mm	0.4 mm	15 m	grey
RND 465-00727	4.5 mm	2.3 mm	0.55 mm	10 m	grey
RND 465-00728	9 mm	4.5 mm	0.6 mm	10 m	grey
RND 465-00729	12 mm	6 mm	0.65 mm	5 m	grey
RND 465-00730	18 mm	9 mm	0.8 mm	5 m	grey
RND 465-00731	25 mm	12.5 mm	0.9 mm	5 m	grey